


SATELLITE MANAGED ASSET READY TRACKER

Designed for the intelligent management of powered and non-powered fixed and movable assets, ON is a practical solution to improve operating efficiency and security.

The "Asset Ready" design allows it to be easily installed and field managed without the need for harnesses, antennas, or external power. The ON is powered by 4 "off-the-shelf" AA 1.5V lithium batteries providing 3+ years of battery life and removes the need to purchase expensive proprietary batteries for replacement.

The ON utilizes motion sensors, comparative GPS positioning and custom configured sensors to gather and transmit asset status information. Each ON is custom configured to track its asset's specific needs and provide intermediate and emergency alerts by email and/or text/cellular.

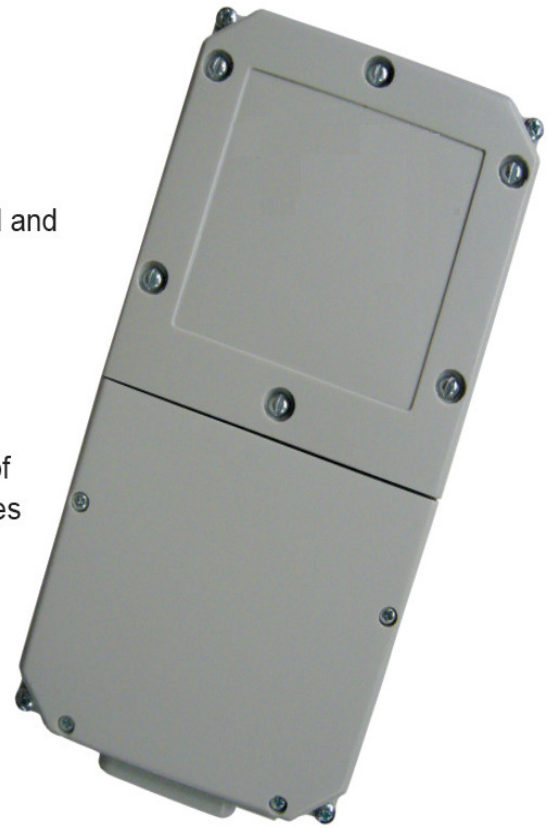

Feature Set:

Standards:

SAE J1455 MIL STD 810
NEMA 4X / IP68
RoHS Compliant

ON Setup:

- Up to 12 different reporting times
- Interval or 24 hour operation mode
- Alternate reporting scheduling
- Low Battery Message
- Motion Sensor/Vibration parameters and scheduling
- Reduced Messaging/Re-centering
- Contact Closure parameters
- Delay To Start
- Diagnostic messages



Unscrew and rotate connector cover to power on/off unit

Hardware on/off feature

- Power on and off by changing the orientation of the connector cover
- Power cycling the unit initiates GPS re-centering functionality

Standard Messaging:

- Wake, GPS locate, Transmit location, Resume sleep
- Up to 12 programmable sleep time-of-wake settings

Alternative Reporting:

- Alternate supervisory reporting schedule triggered by "alarm" or motion
- Transmits GPS location on alternate interval for programmed time or while alarm remains active

Integrated Motion Sensor:

- Message on start and stop
- Engage interval override on motion for set time or while in motion

Messaging Cost Reduction Feature:

- Reduced satellite messaging if asset remains in same location

Change of Location:

- Theft recovery reporting based on distance moved
- Reduced messaging mode

Field Replaceable Batteries:

- Uses 4 AA "off-the-shelf" 1.5V lithium batteries for 3+ years battery life


Accessories:

- Open door sensor
- Bare wire cable
- USB Configuration Cable

Installs in minutes using automotive adhesive tape or included mounting bracket

Global LEO Satellite operation

ON Enclosure Specifications:

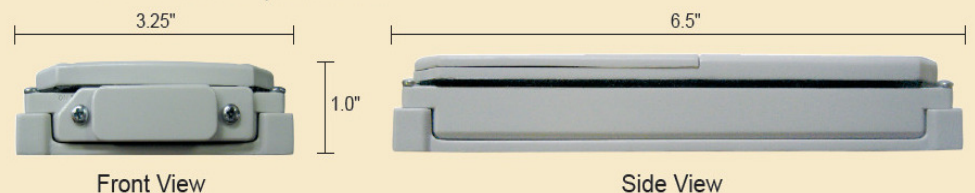

Front View

Side View